



Wiring Diagram for Cyrex M320 (B/W) / MC750 (Color) Video Intercom System


M320: B/W Video Intercom System Kit- includes: 1 Master monitor and 1 door bell camera

EX-320H: B/W Expansion Monitor

EX-320D: B/W Expansion Door Camera

EX-320C: B/W Expansion Dome Camera

Wires: 18 to 24AWG

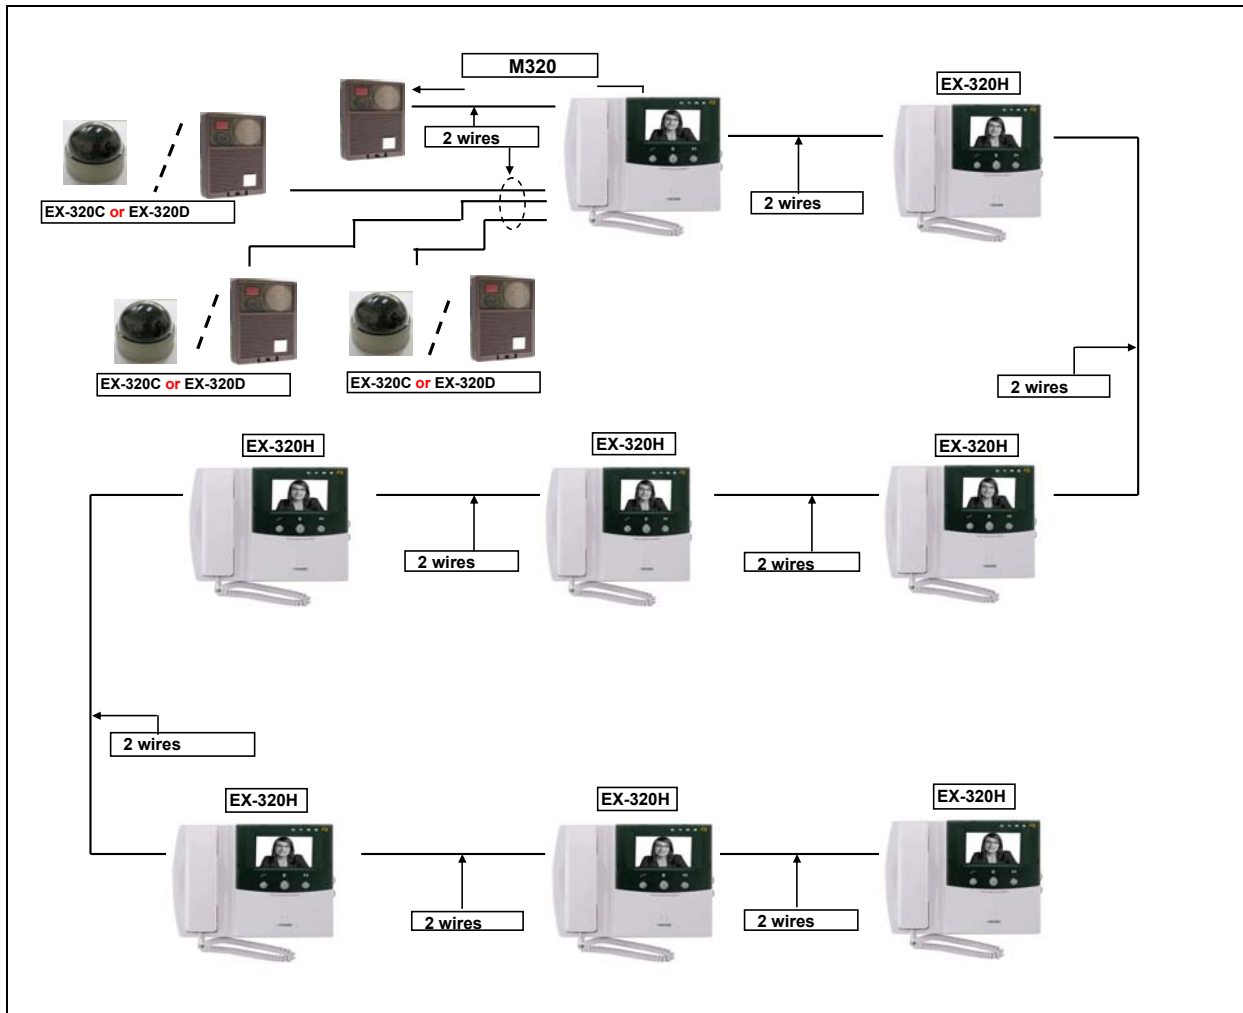

Monitors: The system supports a total of 8 monitors (1 Master and 7 expansions)
 Each monitor requires only 2 wires and is designed to be installed on a serial connection.
 24 to 18 AWG wires. Monitors are polarity sensitive.

Door Bell / Dome: The system supports a total of 4 cameras (Door bell / Dome). Door bell and expansion dome cameras are centrally connected to and powered by the master monitor
 Expansion cameras are non-polarity sensitive.